



# SOLID CARBIDE THREADING TOOLS

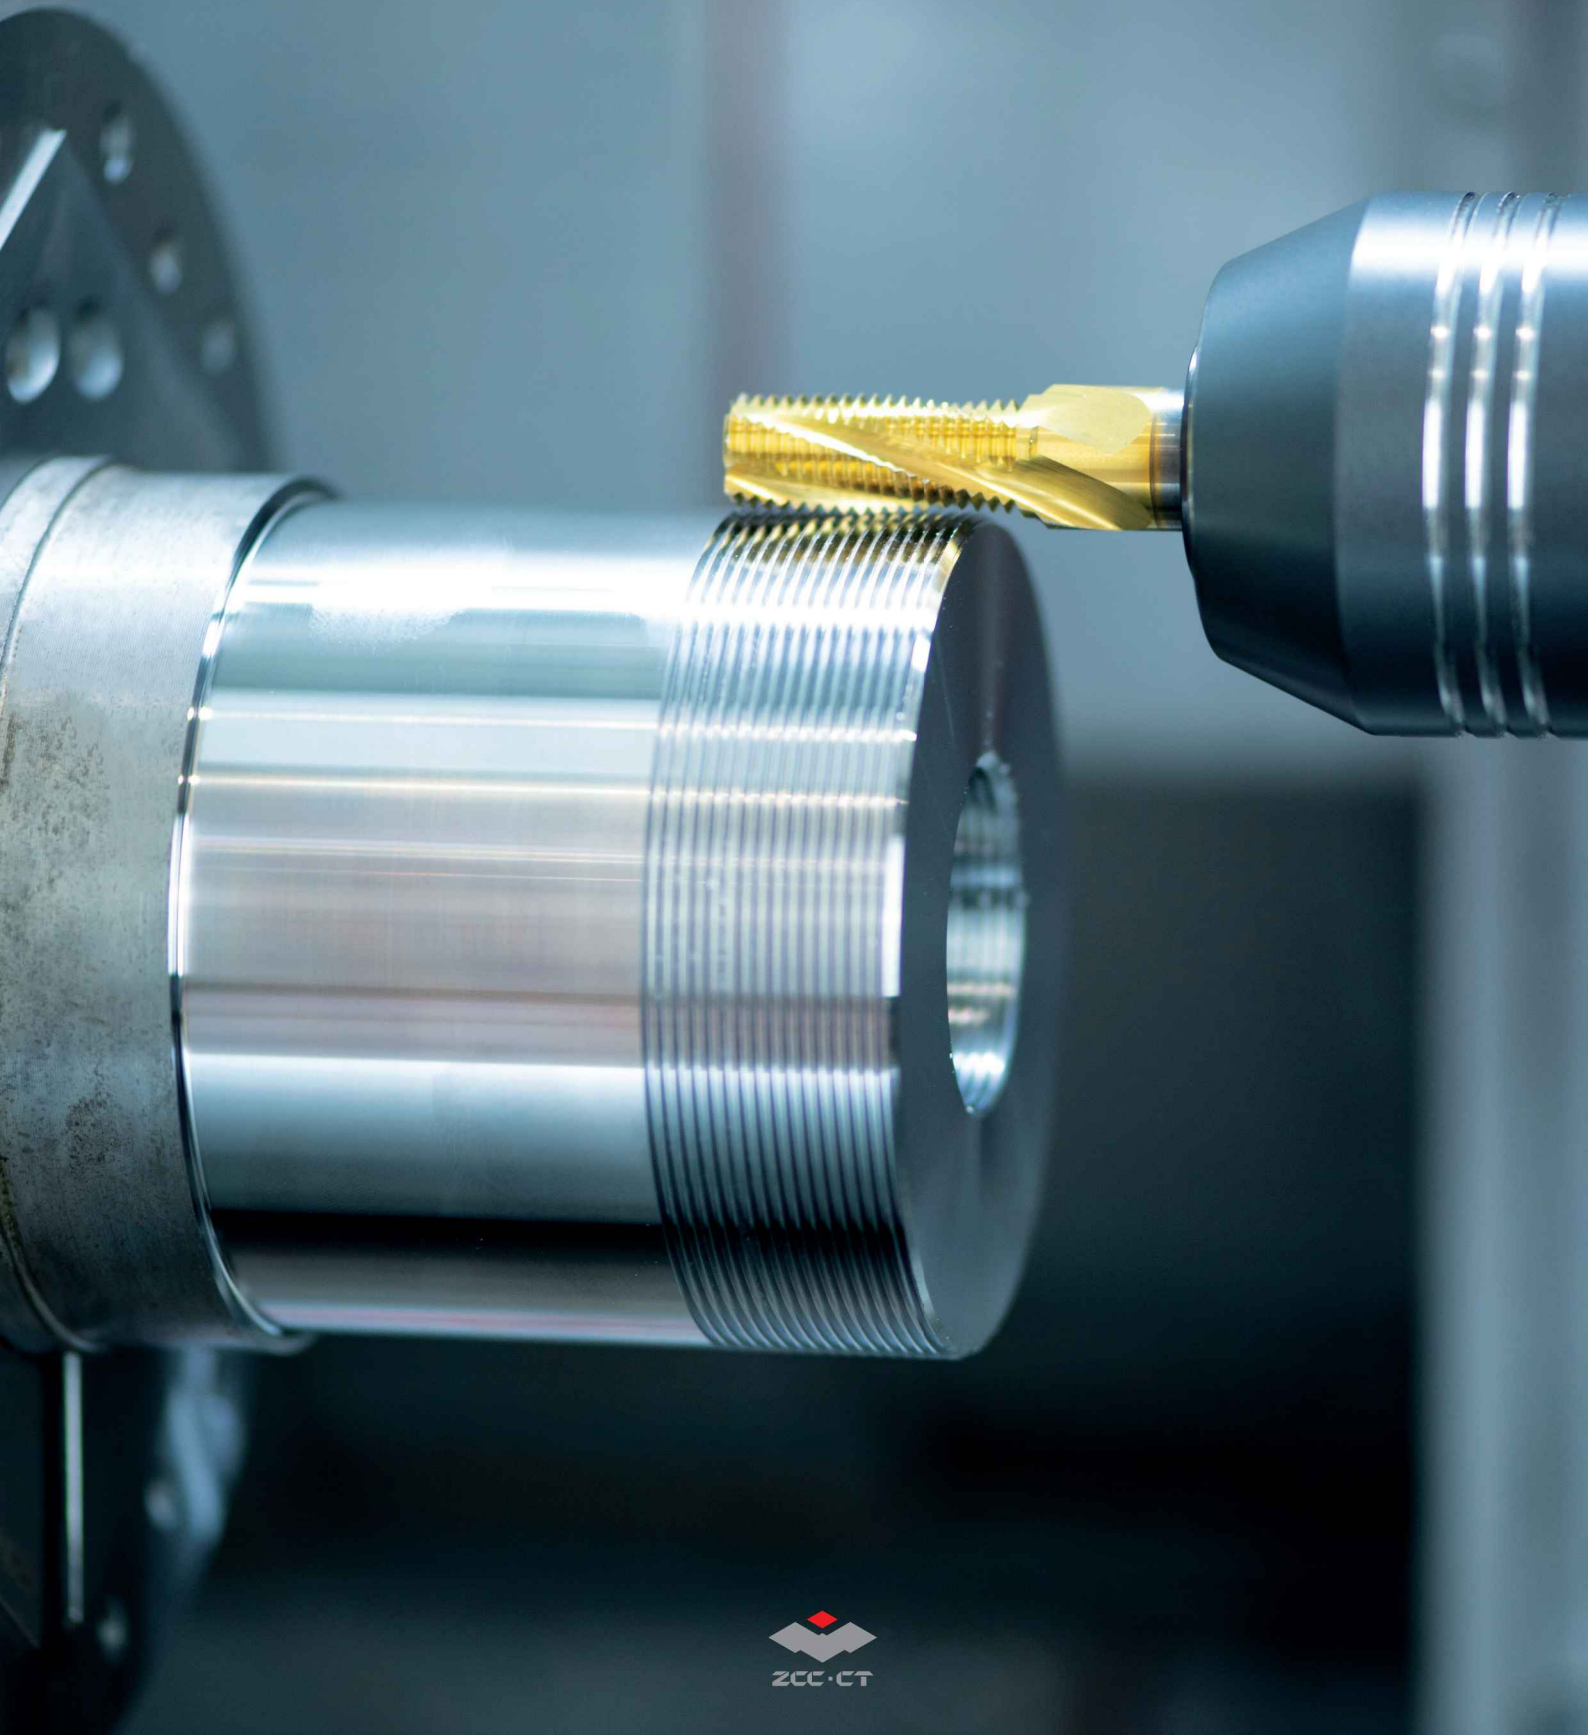

## Solid carbide threading tools

Product overview	C174
Grade overview	C175
System code – solid carbide threading tools	C176
Solid carbide thread formers	C177-C182
Solid carbide taps	C183-C190
Solid carbide thread milling cutters	C191
Recommended cutting data	C192-C197
Technical information	C211-C213
Special tools	C198-C199

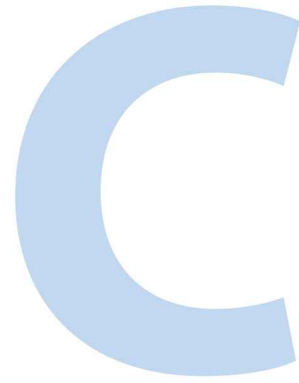

**A**

Turning

**B**

Milling

**C**

Drilling

**D**

Technical  
Information

**E**

Index

**A**

Turning

**B**

Milling

**C**










Drilling

**D**

Technical Information

**E**

Index

Products	Solid carbide threading tools	Ø	Application						Type	Page
			P	M	K	N	S	H		
4122A		M1-M2.5				✓			Solid carbide thread formers	C177
4222A		M3-M16				✓			Solid carbide thread formers	C178
4122M		M1-M2.5	✓	✓					Solid carbide thread formers	C180
4222M		M3-M16	✓	✓					Solid carbide thread formers	C181
4201C		M3-M16			✓				Solid carbide tap, right-hand twist	C183
4202C		M3-M16			✓				Solid carbide tap, straight flute	C185
4201A		M3-M16				✓			Solid carbide tap, right-hand twist	C187
4202A		M3-M16				✓			Solid carbide tap, straight flute	C189
4111		M3-M20	✓		✓	✓			Solid carbide thread milling cutters	C191

✓ Very suitable    ✓ Suitable

### Coated cemented carbide PVD

Grade	Grade description
<b>KTG402</b>	PVD coated P20–P30/M20–M30 carbide substrate for steel and stainless steel. Especially for thread forming tools.

<b>KTG4015</b>	PVD coated P20–P30/K20–K30 carbide substrate for steel and cast iron. Especially for thread forming tools.
----------------	--

### Uncoated cemented carbide

Grade	Grade description
<b>YK40F</b>	Uncoated K20–K30/N20–N30 carbide substrate for cast iron and non ferrous materials.

**A**

Turning

**B**

Milling

**C**

Drilling

**D**

Technical  
Information

**E**

Index

**4 2 0 1 A (C) (S) – M5x0.8 – 6H**

**1 2 3 4 5 6 7 8 9**

**A**

Turning

Type	
Code	Description
4	Threading tool

Shank type	
Code	Description
1	Straight shank
2	Straight shank DIN10
5	Straight shank DIN 6535 HA
9	Conical shank

**B**

Milling

**1**

**2**

Tool type	
Code	Description
0	Tap
1	Thread milling cutter
2	Thread former

Flute	
Code	Description
1	Right-hand twist
2	Straight
3	Left-hand twist

**3**

**4**

**C**

Drilling

Material	
Code	Description
A	Aluminum alloy
C	Cast iron
M	Stainless steel
P	Steel
H	Hardened steel

Coolant supply	
Code	Description
C	Internal

**5**

**6**

**D**

Technical Information

Blind hole	
Code	Description
S	Blind hole

Thread type	
Code	Description
M5x0.8	Standard production tolerance
...	Fine production tolerance

**7**


**8**

Precision class	
Code	Description
6H	Nominal diameter x pitch
6HX	Fine production tolerance

**9**

**E**

Index



a Thread milling    b Thread drilling    c Thread forming


## Thread former

Non-ferrous metals

4122A



– Factory standard



Article	*	Dimensions [mm]								Teeth	Coredrill d	Grade YK40F
			d <sub>1</sub>	P	d <sub>2</sub>	d <sub>3</sub>	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>			
4122AS-M1*0.25-6H		1.5P	M1	0.25	3	1	40	5	6	3	0.9	○
4122AS-M1.2*0.25-6H		1.5P	M1.2	0.25	3	1.2	40	5	6	3	1.1	○
4122A-M1.6*0.35-6H		3P	M1.6	0.35	3	1.1	40	5	11	3	1.47	●
4122AS-M1.6*0.35-6H		1.5P	M1.6	0.35	3	1.1	40	5	11	3	1.47	●
4122A-M2*0.4-6H		3P	M2	0.4	3	1.5	45	6	12	3	1.85	●
4122AS-M2*0.4-6H		1.5P	M2	0.4	3	1.5	45	6	12	3	1.85	●
4122A-M2.5*0.45-6H		3P	M2.5	0.45	3	1.9	50	6	14	3	2.33	○
4122AS-M2.5*0.45-6H		1.5P	M2.5	0.45	3	1.9	50	6	14	3	2.33	●

● Ex stock ○ On demand

\* With internal cooling

### Application field

P	M	K	N	S	H
			✓		

✓ Very suitable

✓ Suitable

System code > C176

Machining instructions > C201

Cutting data > C192

Nonstandard order > C198






### Thread former

### Non-ferrous metals

#### 4222A



- Type of shank DIN 10
- Coolant exit, axial concentric

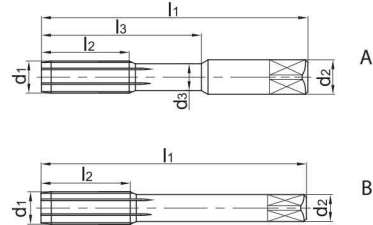

Article	*	Dimensions [mm]									Teeth	Geometry	Coredrill d	Grade YK40F
			d <sub>1</sub>	P	d <sub>2</sub>	d <sub>3</sub>	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>					
4222A-M3*0.5-6H	3P		M3	0.5	3.5	2.3	56	6	18	4	A	2.8	○	
4222AS-M3*0.5-6H	1.5P		M3	0.5	3.5	2.3	56	6	18	4	A	2.8	●	
4222A-M4*0.5-6H	3P		M4	0.5	4.5	3.1	63	8	21	4	A	3.8	○	
4222AS-M4*0.5-6H	1.5P		M4	0.5	4.5	3.1	63	8	21	4	A	3.8	○	
4222A-M4*0.7-6H	3P		M4	0.7	4.5	3.1	63	8	21	4	A	3.7	○	
4222AS-M4*0.7-6H	1.5P		M4	0.7	4.5	3.1	63	8	21	4	A	3.7	○	
4222A-M5*0.5-6H	3P		M5	0.5	6	4.3	70	10	25	4	A	4.8	○	
4222AS-M5*0.5-6H	1.5P		M5	0.5	6	4.3	70	10	25	4	A	4.8	○	
4222A-M5*0.8-6H	3P		M5	0.8	6	4	70	10	25	4	A	4.65	○	
4222AS-M5*0.8-6H	1.5P		M5	0.8	6	4	70	10	25	4	A	4.65	○	
4222A-M6*0.75-6H	3P		M6	0.75	6	5	80	12	30	4	A	5.7	○	
4222AS-M6*0.75-6H	1.5P		M6	0.75	6	5	80	12	30	4	A	5.7	○	
4222A-M6*1-6H	3P		M6	1	6	4.7	80	12	30	4	A	5.6	○	
4222AS-M6*1-6H	1.5P		M6	1	6	4.7	80	12	30	4	A	5.6	○	
4222A-M7*1.0-6H	3P		M7	1	7	5.7	80	14	30	4	A	6.6	○	
4222AS-M7*1.0-6H	1.5P		M7	1	7	5.7	80	14	30	4	A	6.6	○	
4222A-M8*1.0-6H	3P		M8	1	8	6.7	90	16	35	4	A	7.6	○	
4222AS-M8*1-6H	1.5P		M8	1	8	6.7	90	16	35	4	A	7.6	○	
4222A-M8*1.25-6H	3P		M8	1.25	8	6.4	90	16	35	4	A	7.45	○	
4222AS-M8*1.25-6H	1.5P		M8	1.25	8	6.4	90	16	35	4	A	7.45	○	
4222A-M10*1-6H	3P		M10	1	10	8.7	100	20	39	5	A	9.6	○	
4222AS-M10*1-6H	1.5P		M10	1	10	8.7	100	20	39	5	A	9.6	○	
4222A-M10*1.25-6H	3P		M10	1.25	10	8.4	100	20	39	5	A	9.45	○	
4222AS-M10*1.25-6H	1.5P		M10	1.25	10	8.4	100	20	39	5	A	9.45	○	
4222A-M10*1.5-6H	3P		M10	1.5	10	8.1	100	20	39	5	A	9.35	○	
4222AC-M10*1.5-6H	*		M10	1.5	10	8.1	100	20	39	5	A	9.35	○	
4222AS-M10*1.5-6H	1.5P		M10	1.5	10	8.1	100	20	39	5	A	9.35	○	
4222ACS-M10*1.5-6H	*		M10	1.5	10	8.1	100	20	39	5	A	9.35	○	
4222A-M12*1.25-6H	3P		M12	1.25	9		110	24		5	B	11.45	○	
4222AS-M12*1.25-6H	1.5P		M12	1.25	9		110	24		5	B	11.45	○	
4222A-M12*1.5-6H	3P		M12	1.5	9		110	24		5	B	11.35	○	
4222AS-M12*1.5-6H	1.5P		M12	1.5	9		110	24		5	B	11.35	○	
4222A-M12*1.75-6H	3P		M12	1.75	9		110	24		5	B	11.25	○	

● Ex stock ○ On demand

\* With internal cooling

#### Application field

P	M	K	N	S	H
			✓		

✓ Very suitable

✓ Suitable

System code > C176

Machining instructions > C201

Cutting data > C192

Nonstandard order > C198


## Thread former

## Non-ferrous metals

### 4222A



- Type of shank DIN 10
- Coolant exit, axial concentric

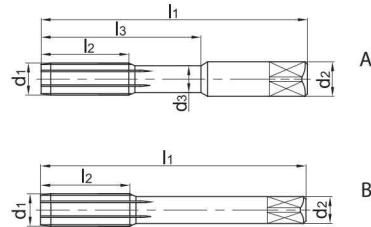

Article	*	Dimensions [mm]								Teeth	Geometry	Coredrill	Grade
			d <sub>1</sub>	P	d <sub>2</sub>	d <sub>3</sub>	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>			d	YK40F
4222AC-M12*1.75-6H	*	3P	M12	1.75	9	110	24	5	B	11.25	○		
4222AS-M12*1.75-6H		1.5P	M12	1.75	9	110	24	5	B	11.25	○		
4222ACS-M12*1.75-6H	*	1.5P	M12	1.75	9	110	24	5	B	11.25	○		
4222A-M14*1.5-6H		3P	M14	1.5	11	110	26	6	B	13.35	○		
4222AS-M14*1.5-6H		1.5P	M14	1.5	11	110	26	6	B	13.35	○		
4222A-M14*2-6H		3P	M14	2	11	110	26	6	B	13.1	○		
4222A-M16*1.5-6H		3P	M16	1.5	12	110	27	6	B	15.35	○		
4222AS-M16*1.5-6H		1.5P	M16	1.5	12	110	27	6	B	15.35	○		
4222A-M16*2-6H		3P	M16	2	12	110	27	6	B	15.1	○		
4222AC-M16*2.0-6H	*	3P	M16	2	12	110	27	6	B	15.1	○		
4222AS-M16*2.0-6H		1.5P	M16	2	12	110	27	6	B	15.1	○		
4222ACS-M16*2.0-6H	*	1.5P	M16	2	12	110	27	6	B	15.1	○		

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
			✓		

- ✓ Very suitable
- ✓ Suitable

A

Turning

B

Milling

C

Drilling

D

Technical Information

E

Index




A

Thread former **Steel, stainless steel**

4122M



– Factory standard



Turning

B

Article	*	Dimensions [mm]									Teeth	Coredrill		Grade	
			d <sub>1</sub>	P	d <sub>2</sub>	d <sub>3</sub>	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	d		KTG402	YK40F		
4122M-M1*0.25-6H		3P	M1	0.25	3		40	5	6	4	0.9	●	○		
4122MS-M1*0.25-6H		2P	M1	0.25	3		40	5	6	4	0.9	●	○		
4122M-M1.2*0.25-6H		3P	M1.2	0.25	3		40	5	6	4	1.1	○	○		
4122MS-M1.2*0.25-6H		2P	M1.2	0.25	3		40	5	6	4	1.1	○	○		
4122M-M1.6*0.35-6H		3P	M1.6	0.35	3	1.1	40	5	11	4	1.47	○	○		
4122MS-M1.6*0.35-6H		2P	M1.6	0.35	3	1.1	40	5	11	4	1.47	○	○		
4122M-M2*0.4-6H		3P	M2	0.4	3	1.5	45	6	12	4	1.85	●	○		
4122MS-M2*0.4-6H		2P	M2	0.4	3	1.5	45	6	12	4	1.85	●	○		
4122M-M2.5*0.45-6H		3P	M2.5	0.45	3	1.9	50	6	14	4	2.33	○	○		
4122MS-M2.5*0.45-6H		2P	M2.5	0.45	3	1.9	50	6	14	4	2.33	●	○		

● Ex stock ○ On demand

\* With internal cooling

Milling

C

Application field

P	M	K	N	S	H
✓	✓				

✓ Very suitable

✓ Suitable

Drilling

D

Technical Information

E

Index

System code > C176

Machining instructions > C201

Cutting data > C192

Nonstandard order > C198


## Thread former

Steel, stainless steel

### 4222M



- Type of shank DIN 10
- Coolant exit, axial concentric

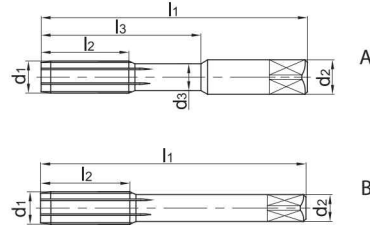

Article	*	Dimensions [mm]									Teeth	Geometry	Coredrill		Grade	
			d <sub>1</sub>	P	d <sub>2</sub>	d <sub>3</sub>	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	d			KTG402	YK40F		
4222M-M3*0.5-6H		3P	M3	0.5	3.5	2.3	56	6	18	4	A	2.8	●	○		
4222MS-M3*0.5-6H		2P	M3	0.5	3.5	2.3	56	6	18	4	A	2.8	○	○		
4222M-M4*0.5-6H		3P	M4	0.5	4.5	3.1	63	8	21	4	A	3.8	●	○		
4222MS-M4*0.5-6H		2P	M4	0.5	4.5	3.1	63	8	21	4	A	3.8	○	○		
4222M-M4*0.7-6H		3P	M4	0.7	4.5	3.1	63	8	21	4	A	3.7	●	○		
4222MS-M4*0.7-6H		2P	M4	0.7	4.5	3.1	63	8	21	4	A	3.7	●	○		
4222M-M5*0.5-6H		3P	M5	0.5	6	4.3	70	10	25	4	A	4.8	●	○		
4222MS-M5*0.5-6H		2P	M5	0.5	6	4.3	70	10	25	4	A	4.8	●	○		
4222M-M5*0.8-6H		3P	M5	0.8	6	4	70	10	25	4	A	4.65	●	○		
4222MS-M5*0.8-6H		2P	M5	0.8	6	4	70	10	25	4	A	4.65	●	○		
4222M-M6*0.75-6H		3P	M6	0.75	6	5	80	12	30	4	A	5.7	●	○		
4222MS-M6*0.75-6H		2P	M6	0.75	6	5	80	12	30	4	A	5.7	●	○		
4222M-M6*1.0-6H		3P	M6	1	6	4.7	80	12	30	4	A	5.6	●	○		
4222MS-M6*1.0-6H		2P	M6	1	6	4.7	80	12	30	4	A	5.6	●	○		
4222M-M7*1.0-6H		3P	M7	1	7	5.7	80	14	30	4	A	6.6	○	○		
4222MS-M7*1.0-6H		2P	M7	1	7	5.7	80	14	30	4	A	6.6	○	○		
4222M-M8*1.0-6H		3P	M8	1	8	6.7	90	16	35	4	A	7.6	●	○		
4222MS-M8*1.0-6H		2P	M8	1	8	6.7	90	16	35	4	A	7.6	○	○		
4222M-M8*1.25-6H		3P	M8	1.25	8	6.4	90	16	35	4	A	7.45	●	○		
4222MS-M8*1.25-6H		2P	M8	1.25	8	6.4	90	16	35	4	A	7.45	●	○		
4222M-M10*1.0-6H		3P	M10	1	10	8.7	100	20	39	5	A	9.6	○	○		
4222MS-M10*1.0-6H		2P	M10	1	10	8.7	100	20	39	5	A	9.6	○	○		
4222M-M10*1.25-6H		3P	M10	1.25	10	8.4	100	20	39	5	A	9.45	○	○		
4222MS-M10*1.25-6H		2P	M10	1.25	10	8.4	100	20	39	5	A	9.45	●	○		
4222M-M10*1.5-6H		3P	M10	1.5	10	8.1	100	20	39	5	A	9.35	●	○		
4222MC-M10*1.5-6H	*	3P	M10	1.5	10	8.1	100	20	39	5	A	9.35	●	○		
4222MS-M10*1.5-6H		2P	M10	1.5	10	8.1	100	20	39	5	A	9.35	●	○		
4222MCS-M10*1.5-6H	*	2P	M10	1.5	10	8.1	100	20	39	5	A	9.35	●	○		
4222M-M12*1.25-6H		3P	M12	1.25	9		110	24		5	B	11.45	●	○		
4222MS-M12*1.25-6H		2P	M12	1.25	9		110	24		5	B	11.45	●	○		
4222M-M12*1.5-6H		3P	M12	1.5	9		110	24		5	B	11.35	○	○		
4222MS-M12*1.5-6H		2P	M12	1.5	9		110	24		5	B	11.35	○	○		
4222M-M12*1.75-6H		3P	M12	1.75	9		110	24		5	B	11.25	○	○		

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓				

✓ Very suitable

✓ Suitable

System code > C176

Machining instructions > C201

Cutting data > C192

Nonstandard order > C198




A

Thread former **Steel, stainless steel**

4222M



- Type of shank DIN 10
- Coolant exit, axial concentric

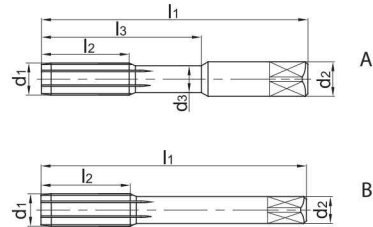

Turning

B

Milling

C

Drilling

Article	*	Dimensions [mm]									Teeth	Geometry	Coredrill		Grade	
			d <sub>1</sub>	P	d <sub>2</sub>	d <sub>3</sub>	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	d			KTG402	YK40F		
4222MC-M12*1.75-6H	*	3P	M12	1.75	9		110	24	5	B	11.25	○	○			
4222MS-M12*1.75-6H		2P	M12	1.75	9		110	24	5	B	11.25	●	○			
4222MCS-M12*1.75-6H	*	2P	M12	1.75	9		110	24	5	B	11.25	○	○			
4222M-M14*1.5-6H		3P	M14	1.5	11		110	26	6	B	13.35	●	○			
4222MS-M14*1.5-6H		2P	M14	1.5	11		110	26	6	B	13.35	○	○			
4222M-M14*2.0-6H		3P	M14	2	11		110	26	6	B	13.1	○	○			
4222MS-M14*2.0-6H		2P	M14	2	11		110	26	6	B	13.1	○	○			
4222M-M16*1.5-6H		3P	M16	1.5	12		110	27	6	B	15.35	●	○			
4222MS-M16*1.5-6H		2P	M16	1.5	12		110	27	6	B	15.35	○	○			
4222M-M16*2.0-6H		3P	M16	2	12		110	27	6	B	15.1	○	○			
4222MC-M16*2.0-6H	*	3P	M16	2	12		110	27	6	B	15.1	○	○			
4222MS-M16*2.0-6H		2P	M16	2	12		110	27	6	B	15.1	○	○			
4222MCS-M16*2.0-6H	*	2P	M16	2	12		110	27	6	B	15.1	●	○			

● Ex stock ○ On demand

\* With internal cooling

D

Technical Information

Application field

P	M	K	N	S	H
✓	✓				

✓ Very suitable

✓ Suitable

E

Index

System code > C176

Machining instructions > C201

Cutting data > C192

Nonstandard order > C198


Tap, right-hand twist

Cast iron

4201C



- Type of shank DIN 10
- Coolant exit, axial concentric

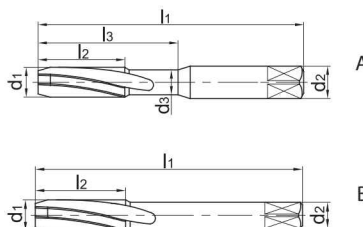

Article	*	Dimensions [mm]									Teeth	Geometry	Coredrill		Grade
			d <sub>1</sub>	P	d <sub>2</sub>	d <sub>3</sub>	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	d			YK40F		
4201C-M3*0.5-6H		3P	M3	0.5	3.5	2.3	56	11	18	3	A	2.5	●		
4201C-M3*0.5-6HX		3P	M3	0.5	3.5	2.3	56	11	18	3	A	2.5	●		
4201CS-M3*0.5-6H		1.5P	M3	0.5	3.5	2.3	56	11	18	3	A	2.5	●		
4201CS-M3*0.5-6HX		1.5P	M3	0.5	3.5	2.3	56	11	18	3	A	2.5	●		
4201C-M4*0.7-6H		3P	M4	0.7	4.5	3.1	63	13	21	3	A	3.3	●		
4201C-M4*0.7-6HX		3P	M4	0.7	4.5	3.1	63	13	21	3	A	3.3	●		
4201CS-M4*0.7-6H		1.5P	M4	0.7	4.5	3.1	63	13	21	3	A	3.3	●		
4201CS-M4*0.7-6HX		1.5P	M4	0.7	4.5	3.1	63	13	21	3	A	3.3	●		
4201C-M5*0.8-6H		3P	M5	0.8	6	4	70	16	25	3	A	4.2	●		
4201C-M5*0.8-6HX		3P	M5	0.8	6	4	70	16	25	3	A	4.2	●		
4201CS-M5*0.8-6H		1.5P	M5	0.8	6	4	70	16	25	3	A	4.2	●		
4201CS-M5*0.8-6HX		1.5P	M5	0.8	6	4	70	16	25	3	A	4.2	●		
4201C-M6*0.75-6H		3P	M6	0.75	6	5	80	19	30	3	A	5.25	●		
4201C-M6*0.75-6HX		3P	M6	0.75	6	5	80	19	30	3	A	5.25	●		
4201CS-M6*0.75-6H		1.5P	M6	0.75	6	5	80	19	30	3	A	5.25	●		
4201CS-M6*0.75-6HX		1.5P	M6	0.75	6	5	80	19	30	3	A	5.25	●		
4201C-M6*1-6H		3P	M6	1	6	4.7	80	19	30	3	A	5	○		
4201CC-M6*1-6H	*	3P	M6	1	6	4.7	80	19	30	3	A	5	○		
4201C-M6*1-6HX		3P	M6	1	6	4.7	80	19	30	3	A	5	○		
4201CS-M6*1.0-6H		1.5P	M6	1	6	4.7	80	19	30	3	A	5	●		
4201CCS-M6*1-6H	*	1.5P	M6	1	6	4.7	80	19	30	3	A	5	●		
4201CS-M6*1.0-6HX		1.5P	M6	1	6	4.7	80	19	30	3	A	5	●		
4201C-M7*1-6H		3P	M7	1	7	5.7	80	19	30	3	A	6	○		
4201CS-M7*1.0-6H		1.5P	M7	1	7	5.7	80	19	30	3	A	6	●		
4201C-M8*1-6H		3P	M8	1	8	6.7	90	20	35	3	A	7	○		
4201CS-M8*1.0-6H		1.5P	M8	1	8	6.7	90	20	35	3	A	7	●		
4201C-M8*1.25-6H		3P	M8	1.25	8	6.4	90	22	35	3	A	6.75	●		
4201CC-M8*1.25-6H	*	3P	M8	1.25	8	6.4	90	22	35	3	A	6.75	●		
4201C-M8*1.25-6HX		3P	M8	1.25	8	6.4	90	22	35	3	A	6.75	●		
4201CS-M8*1.25-6H		1.5P	M8	1.25	8	6.4	90	22	35	3	A	6.75	○		
4201CCS-M8*1.25-6H	*	1.5P	M8	1.25	8	6.4	90	22	35	3	A	6.75	○		
4201CS-M8*1.25-6HX		1.5P	M8	1.25	8	6.4	90	22	35	3	A	6.75	○		
4201C-M10*1-6H		3P	M10	1	10	8.7	100	20	39	4	A	9	○		

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
		✓			

✓ Very suitable

✓ Suitable

System code > C176

Machining instructions > C201

Cutting data > C192

Nonstandard order > C198



A

Turning

B

Milling

C

Drilling

D

Technical Information

E

Index


## Tap, right-hand twist

Cast iron

4201C



- Type of shank DIN 10
- Coolant exit, axial concentric

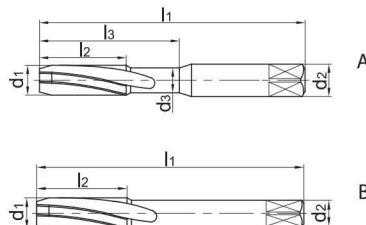

Article	*	Dimensions [mm]									Teeth	Geometry	Coredrill d	Grade YK40F
			d <sub>1</sub>	P	d <sub>2</sub>	d <sub>3</sub>	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>					
4201CS-M10*1-6H		1.5P	M10	1	10	8.7	100	20	39	4	A	9	○	
4201C-M10*1.25-6H		3P	M10	1.25	10	8.4	100	24	39	4	A	8.75	○	
4201CS-M10*1.25-6H		1.5P	M10	1.25	10	8.4	100	24	39	4	A	8.75	○	
4201C-M10*1.5-6H		3P	M10	1.5	10	8.1	100	24	39	4	A	8.5	○	
4201CC-M10*1.5-6H	*	3P	M10	1.5	10	8.1	100	24	39	4	A	8.5	○	
4201C-M10*1.5-6HX		3P	M10	1.5	10	8.1	100	24	39	4	A	8.5	○	
4201CS-M10*1.5-6H		1.5P	M10	1.5	10	8.1	100	24	39	4	A	8.5	○	
4201CCS-M10*1.5-6H	*	1.5P	M10	1.5	10	8.1	100	24	39	4	A	8.5	●	
4201CS-M10*1.5-6HX		1.5P	M10	1.5	10	8.1	100	24	39	4	A	8.5	○	
4201C-M12*1.25-6H		3P	M12	1.25	9		110	29		4	B	10.75	○	
4201CS-M12*1.25-6H		1.5P	M12	1.25	9		110	29		4	B	10.75	○	
4201C-M12*1.5-6H		3P	M12	1.5	9		110	29		4	B	10.5	○	
4201CS-M12*1.5-6H		1.5P	M12	1.5	9		110	29		4	B	10.5	○	
4201C-M12*1.75-6H		3P	M12	1.75	9		110	29		4	B	10.25	○	
4201CC-M12*1.75-6H	*	3P	M12	1.75	9		110	29		4	B	10.25	●	
4201C-M12*1.75-6HX		3P	M12	1.75	9		110	29		4	B	10.25	○	
4201CS-M12*1.75-6H		1.5P	M12	1.75	9		110	29		4	B	10.25	○	
4201CCS-M12*1.75-6H	*	1.5P	M12	1.75	9		110	29		4	B	10.25	○	
4201CS-M12*1.75-6HX		1.5P	M12	1.75	9		110	29		4	B	10.25	○	
4201C-M14*1.5-6H		3P	M14	1.5	11		110	30		4	B	12.5	○	
4201CS-M14*1.5-6H		1.5P	M14	1.5	11		110	30		4	B	12.5	○	
4201C-M14*2-6H		3P	M14	2	11		110	30		4	B	12	○	
4201CS-M14*2-6H		1.5P	M14	2	11		110	30		4	B	12	○	
4201C-M16*1.5-6H		3P	M16	1.5	12		110	32		4	B	14.5	○	
4201CS-M16*1.5-6H		1.5P	M16	1.5	12		110	32		4	B	14.5	○	
4201C-M16*2-6H		3P	M16	2	12		110	32		4	B	14	○	
4201CS-M16*2-6H		1.5P	M16	2	12		110	32		4	B	14	○	
4201C-M16*2-6HX		3P	M16	2	12		110	32		4	B	14	○	
4201CS-M16*2-6H		1.5P	M16	2	12		110	32		4	B	14	○	
4201CS-M16*2.0-6HX		1.5P	M16	2	12		110	32		4	B	14	●	

● Ex stock ○ On demand

\* With internal cooling

### Application field

P	M	K	N	S	H
		✓			

✓ Very suitable

✓ Suitable

System code > C176

Machining instructions > C201

Cutting data > C192

Nonstandard order > C198




## Tap, straight flute

Cast iron

### 4202C



- Type of shank DIN 10
- Coolant exit, axial concentric

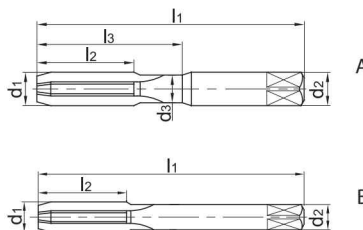

Article	*	Dimensions [mm]									Teeth	Geometry	Coredrill		Grade
			d <sub>1</sub>	P	d <sub>2</sub>	d <sub>3</sub>	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	d			YK40F		
4202C-M3*0.5-6H		3P	M3	0.5	3.5	2.3	56	11	18	3	A	2.5	○		
4202C-M3*0.5-6HX		3P	M3	0.5	3.5	2.3	56	11	18	3	A	2.5	○		
4202CS-M3*0.5-6H		1.5P	M3	0.5	3.5	2.3	56	11	18	3	A	2.5	○		
4202CS-M3*0.5-6HX		1.5P	M3	0.5	3.5	2.3	56	11	18	3	A	2.5	○		
4202C-M4*0.7-6H		3P	M4	0.7	4.5	3.1	63	13	21	3	A	3.3	●		
4202C-M4*0.7-6HX		3P	M4	0.7	4.5	3.1	63	13	21	3	A	3.3	○		
4202CS-M4*0.7-6H		1.5P	M4	0.7	4.5	3.1	63	13	21	3	A	3.3	○		
4202CS-M4*0.7-6HX		1.5P	M4	0.7	4.5	3.1	63	13	21	3	A	3.3	○		
4202C-M5*0.8-6H		3P	M5	0.8	6	4	70	16	25	3	A	4.2	○		
4202C-M5*0.8-6HX		3P	M5	0.8	6	4	70	16	25	3	A	4.2	○		
4202CS-M5*0.8-6H		1.5P	M5	0.8	6	4	70	16	25	3	A	4.2	○		
4202CS-M5*0.8-6HX		1.5P	M5	0.8	6	4	70	16	25	3	A	4.2	○		
4202C-M6*0.75-6H		3P	M6	0.75	6	5	80	19	30	3	A	5.25	○		
4202C-M6*0.75-6HX		3P	M6	0.75	6	5	80	19	30	3	A	5.25	○		
4202CS-M6*0.75-6H		1.5P	M6	0.75	6	5	80	19	30	3	A	5.25	○		
4202CS-M6*0.75-6HX		1.5P	M6	0.75	6	5	80	19	30	3	A	5.25	○		
4202C-M6*1.0-6H		3P	M6	1	6	4.7	80	19	30	3	A	5	○		
4202CC-M6*1.0-6H	*	3P	M6	1	6	4.7	80	19	30	3	A	5	○		
4202C-M6*1.0-6HX		3P	M6	1	6	4.7	80	19	30	3	A	5	○		
4202CS-M6*1.0-6H		1.5P	M6	1	6	4.7	80	19	30	3	A	5	○		
4202CCS-M6*1.0-6H	*	1.5P	M6	1	6	4.7	80	19	30	3	A	5	○		
4202CS-M6*1.0-6HX		1.5P	M6	1	6	4.7	80	19	30	3	A	5	○		
4202C-M7*1.0-6H		3P	M7	1	7	5.7	80	19	30	3	A	6	○		
4202CS-M7*1.0-6H		1.5P	M7	1	7	5.7	80	19	30	3	A	6	○		
4202C-M8*1-6H		3P	M8	1	8	6.7	90	20	35	3	A	7	○		
4202CS-M8*1.0-6H		1.5P	M8	1	8	6.7	90	20	35	3	A	7	○		
4202C-M8*1.25-6H		3P	M8	1.25	8	6.4	90	22	35	3	A	6.75	○		
4202CC-M8*1.25-6H	*	3P	M8	1.25	8	6.4	90	22	35	3	A	6.75	○		
4202C-M8*1.25-6HX		3P	M8	1.25	8	6.4	90	22	35	3	A	6.75	○		
4202CS-M8*1.25-6H		1.5P	M8	1.25	8	6.4	90	22	35	3	A	6.75	○		
4202CCS-M8*1.25-6H	*	1.5P	M8	1.25	8	6.4	90	22	35	3	A	6.75	○		
4202CS-M8*1.25-6HX		1.5P	M8	1.25	8	6.4	90	22	35	3	A	6.75	○		
4202C-M10*1.0-6H		3P	M10	1	10	8.7	100	20	39	4	A	9	○		

● Ex stock ○ On demand

\* With internal cooling

#### Application field

P	M	K	N	S	H
		✓			

✓ Very suitable

✓ Suitable

System code > C176

Machining instructions > C201

Cutting data > C192

Nonstandard order > C198






## Tap, straight flute

Cast iron

4202C



- Type of shank DIN 10
- Coolant exit, axial concentric

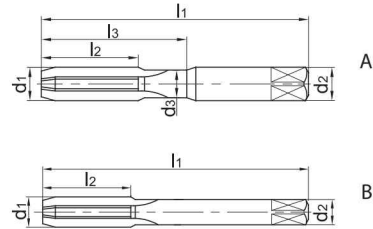

Article	*	Dimensions [mm]									Teeth	Geometry	Coredrill d	Grade YK40F
			d <sub>1</sub>	P	d <sub>2</sub>	d <sub>3</sub>	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>					
4202CS-M10*1.0-6H		1.5P	M10	1	10	8.7	100	20	39	4	A	9	○	
4202C-M10*1.25-6H		3P	M10	1.25	10	8.4	100	24	39	4	A	8.75	○	
4202CS-M10*1.25-6H		1.5P	M10	1.25	10	8.4	100	24	39	4	A	8.75	○	
4202C-M10*1.5-6H		3P	M10	1.5	10	8.1	100	24	39	4	A	8.5	○	
4202CC-M10*1.5-6H	*	3P	M10	1.5	10	8.1	100	24	39	4	A	8.5	○	
4202C-M10*1.5-6HX		3P	M10	1.5	10	8.1	100	24	39	4	A	8.5	○	
4202CS-M10*1.5-6H		1.5P	M10	1.5	10	8.1	100	24	39	4	A	8.5	○	
4202CCS-M10*1.5-6H	*	1.5P	M10	1.5	10	8.1	100	24	39	4	A	8.5	○	
4202CS-M10*1.5-6HX		1.5P	M10	1.5	10	8.1	100	24	39	4	A	8.5	○	
4202C-M12*1.25-6H		3P	M12	1.25	9		110	29		4	B	10.75	○	
4202CS-M12*1.25-6H		1.5P	M12	1.25	9		110	29		4	B	10.75	○	
4202C-M12*1.5-6H		3P	M12	1.5	9		110	29		4	B	10.5	○	
4202CS-M12*1.5-6H		1.5P	M12	1.5	9		110	29		4	B	10.5	○	
4202C-M12*1.75-6H		3P	M12	1.75	9		110	29		4	B	10.25	○	
4202CC-M12*1.75-6H	*	3P	M12	1.75	9		110	29		4	B	10.25	○	
4202C-M12*1.75-6HX		3P	M12	1.75	9		110	29		4	B	10.25	○	
4202CS-M12*1.75-6H		1.5P	M12	1.75	9		110	29		4	B	10.25	○	
4202CCS-M12*1.75-6H	*	1.5P	M12	1.75	9		110	29		4	B	10.25	○	
4202CS-M12*1.75-6HX		1.5P	M12	1.75	9		110	29		4	B	10.25	○	
4202C-M14*1.5-6H		3P	M14	1.5	11		110	30		4	B	12.5	○	
4202CS-M14*1.5-6H		1.5P	M14	1.5	11		110	30		4	B	12.5	○	
4202C-M14*2.0-6H		3P	M14	2	11		110	30		4	B	12	○	
4202CS-M14*2.0-6H		1.5P	M14	2	11		110	30		4	B	12	○	
4202C-M16*1.5-6H		3P	M16	1.5	12		110	32		4	B	14.5	○	
4202CS-M16*1.5-6H		1.5P	M16	1.5	12		110	32		4	B	14.5	○	
4202C-M16*2-6H		3P	M16	2	12		110	32		4	B	14	○	
4202C-M16*2-6HX		3P	M16	2	12		110	32		4	B	14	○	
4202CS-M16*2-6H		1.5P	M16	2	12		110	32		4	B	14	○	
4202CS-M16*2.0-6HX		1.5P	M16	2	12		110	32		4	B	14	○	

● Ex stock ○ On demand

\* With internal cooling

### Application field

P	M	K	N	S	H
		✓			

- ✓ Very suitable
- ✓ Suitable

System code > C176

Machining instructions > C201

Cutting data > C192

Nonstandard order > C198


## Tap, right-hand twist

## Non-ferrous metals

## 4201A



- Type of shank DIN 10
- Coolant exit, axial concentric

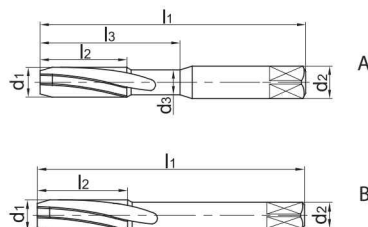

Article	*	Dimensions [mm]									Teeth	Geometry	Coredrill		Grade
			d <sub>1</sub>	P	d <sub>2</sub>	d <sub>3</sub>	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	d			YK40F		
4201A-M3*0.5-6H		3P	M3	0.5	3.5	2.3	56	11	18	3	A	2.5	●		
4201A-M3*0.5-6HX		3P	M3	0.5	3.5	2.3	56	11	18	3	A	2.5	○		
4201AS-M3*0.5-6H		1.5P	M3	0.5	3.5	2.3	56	11	18	3	A	2.5	●		
4201AS-M3*0.5-6HX		1.5P	M3	0.5	3.5	2.3	56	11	18	3	A	2.5	○		
4201A-M4*0.7-6H		3P	M4	0.7	4.5	3.1	63	13	21	3	A	3.3	●		
4201A-M4*0.7-6HX		3P	M4	0.7	4.5	3.1	63	13	21	3	A	3.3	○		
4201AS-M4*0.7-6H		1.5P	M4	0.7	4.5	3.1	63	13	21	3	A	3.3	●		
4201AS-M4*0.7-6HX		1.5P	M4	0.7	4.5	3.1	63	13	21	3	A	3.3	○		
4201A-M5*0.8-6H		3P	M5	0.8	6	4	70	16	25	3	A	4.2	○		
4201A-M5*0.8-6HX		3P	M5	0.8	6	4	70	16	25	3	A	4.2	○		
4201AS-M5*0.8-6H		1.5P	M5	0.8	6	4	70	16	25	3	A	4.2	●		
4201AS-M5*0.8-6HX		1.5P	M5	0.8	6	4	70	16	25	3	A	4.2	○		
4201A-M6*0.75-6H		3P	M6	0.75	6	5	80	19	30	3	A	5.25	○		
4201A-M6*0.75-6HX		3P	M6	0.75	6	5	80	19	30	3	A	5.25	●		
4201AS-M6*0.75-6H		1.5P	M6	0.75	6	5	80	19	30	3	A	5.25	●		
4201AS-M6*0.75-6HX		1.5P	M6	0.75	6	5	80	19	30	3	A	5.25	○		
4201A-M6*1-6H		3P	M6	1	6	4.7	80	19	30	3	A	5	○		
4201AC-M6*1-6H	*	3P	M6	1	6	4.7	80	19	30	3	A	5	○		
4201A-M6*1-6HX		3P	M6	1	6	4.7	80	19	30	3	A	5	○		
4201AS-M6*1-6H		1.5P	M6	1	6	4.7	80	19	30	3	A	5	●		
4201ACS-M6*1-6H	*	1.5P	M6	1	6	4.7	80	19	30	3	A	5	●		
4201AS-M6*1-6HX		1.5P	M6	1	6	4.7	80	19	30	3	A	5	○		
4201A-M7*1-6H		3P	M7	1	7	5.7	80	19	30	3	A	6	○		
4201AS-M7*1-6H		1.5P	M7	1	7	5.7	80	19	30	3	A	6	○		
4201A-M8*1-6H		3P	M8	1	8	6.7	90	20	35	3	A	7	○		
4201AS-M8*1-6H		1.5P	M8	1	8	6.7	90	20	35	3	A	7	●		
4201A-M8*1.25-6H		3P	M8	1.25	8	6.4	90	22	35	3	A	6.75	○		
4201AC-M8*1.25-6H	*	3P	M8	1.25	8	6.4	90	22	35	3	A	6.75	●		
4201A-M8*1.25-6HX		3P	M8	1.25	8	6.4	90	22	35	3	A	6.75	○		
4201AS-M8*1.25-6H		1.5P	M8	1.25	8	6.4	90	22	35	3	A	6.75	●		
4201ACS-M8*1.25-6H	*	1.5P	M8	1.25	8	6.4	90	22	35	3	A	6.75	●		
4201AS-M8*1.25-6HX		1.5P	M8	1.25	8	6.4	90	22	35	3	A	6.75	○		
4201A-M10*1-6H		3P	M10	1	10	8.7	100	20	39	4	A	9	●		

● Ex stock ○ On demand

\* With internal cooling

## Application field

P	M	K	N	S	H
			✓		

✓ Very suitable

✓ Suitable

System code &gt; C176

Machining instructions &gt; C201

Cutting data &gt; C192

Nonstandard order &gt; C198





## Tap, right-hand twist

## Non-ferrous metals

### 4201A



- Type of shank DIN 10
- Coolant exit, axial concentric



Article	*	Dimensions [mm]									Teeth	Geometry	Coredrill		Grade
			d <sub>1</sub>	P	d <sub>2</sub>	d <sub>3</sub>	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	d			YK40F		
4201AS-M10*1-6H		1.5P	M10	1	10	8.7	100	20	39	4	A	9	●		
4201A-M10*1.25-6H		3P	M10	1.25	10	8.4	100	24	39	4	A	8.75	○		
4201AS-M10*1.25-6H		1.5P	M10	1.25	10	8.4	100	24	39	4	A	8.75	○		
4201A-M10*1.5-6H		3P	M10	1.5	10	8.1	100	24	39	4	A	8.5	○		
4201AC-M10*1.5-6H	*	3P	M10	1.5	10	8.1	100	24	39	4	A	8.5	●		
4201A-M10*1.5-6HX		3P	M10	1.5	10	8.1	100	24	39	4	A	8.5	○		
4201AS-M10*1.5-6H		1.5P	M10	1.5	10	8.1	100	24	39	4	A	8.5	●		
4201ACS-M10*1.5-6H	*	1.5P	M10	1.5	10	8.1	100	24	39	4	A	8.5	○		
4201AS-M10*1.5-6HX		1.5P	M10	1.5	10	8.1	100	24	39	4	A	8.5	○		
4201A-M12*1.25-6H		3P	M12	1.25	9		110	29		4	B	10.75	○		
4201AS-M12*1.25-6H		1.5P	M12	1.25	9		110	29		4	B	10.75	○		
4201A-M12*1.5-6H		3P	M12	1.5	9		110	29		4	B	10.5	○		
4201AS-M12*1.5-6H		1.5P	M12	1.5	9		110	29		4	B	10.5	○		
4201A-M12*1.75-6H		3P	M12	1.75	9		110	29		4	B	10.25	○		
4201AC-M12*1.75-6H	*	3P	M12	1.75	9		110	29		4	B	10.25	○		
4201A-M12*1.75-6HX		3P	M12	1.75	9		110	29		4	B	10.25	○		
4201AS-M12*1.75-6H		1.5P	M12	1.75	9		110	29		4	B	10.25	●		
4201ACS-M12*1.75-6H	*	1.5P	M12	1.75	9		110	29		4	B	10.25	○		
4201AS-M12*1.75-6HX		1.5P	M12	1.75	9		110	29		4	B	10.25	○		
4201A-M14*1.5-6H		3P	M14	1.5	11		110	30		4	B	12.5	○		
4201AS-M14*1.5-6H		1.5P	M14	1.5	11		110	30		4	B	12.5	○		
4201A-M14*2-6H		3P	M14	2	11		110	30		4	B	12	○		
4201AS-M14*2-6H		1.5P	M14	2	11		110	30		4	B	12	○		
4201A-M16*1.5-6H		3P	M16	1.5	12		110	32		4	B	14.5	○		
4201AS-M16*1.5-6H		1.5P	M16	1.5	12		110	32		4	B	14.5	○		
4201A-M16*2-6H		3P	M16	2	12		110	32		4	B	14	○		
4201AS-M16*2-6H		1.5P	M16	2	12		110	32		4	B	14	○		
4201A-M16*2-6HX		3P	M16	2	12		110	32		4	B	14	○		
4201AS-M16*2-6H		1.5P	M16	2	12		110	32		4	B	14	○		
4201AS-M16*2-6HX		1.5P	M16	2	12		110	32		4	B	14	○		

● Ex stock ○ On demand

\* With internal cooling

### Application field

P	M	K	N	S	H
			✓		

- ✓ Very suitable
- ✓ Suitable

System code > C176

Machining instructions > C201

Cutting data > C192

Nonstandard order > C198


## Tap, straight flute

## Non-ferrous metals

## 4202A



- Type of shank DIN 10
- Coolant exit, axial concentric

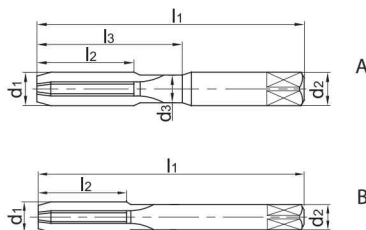

Article	*	Dimensions [mm]									Teeth	Geometry	Coredrill	Grade
			d <sub>1</sub>	P	d <sub>2</sub>	d <sub>3</sub>	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	d			YK40F	
4202A-M3*0.5-6H		3P	M3	0.5	3.5	2.3	56	11	18	3	A	2.5	○	
4202A-M3*0.5-6HX		3P	M3	0.5	3.5	2.3	56	11	18	3	A	2.5	○	
4202AS-M3*0.5-6H		1.5P	M3	0.5	3.5	2.3	56	11	18	3	A	2.5	○	
4202AS-M3*0.5-6HX		1.5P	M3	0.5	3.5	2.3	56	11	18	3	A	2.5	○	
4202A-M4*0.7-6H		3P	M4	0.7	4.5	3.1	63	13	21	3	A	3.3	○	
4202A-M4*0.7-6HX		3P	M4	0.7	4.5	3.1	63	13	21	3	A	3.3	○	
4202AS-M4*0.7-6H		1.5P	M4	0.7	4.5	3.1	63	13	21	3	A	3.3	○	
4202AS-M4*0.7-6HX		1.5P	M4	0.7	4.5	3.1	63	13	21	3	A	3.3	○	
4202A-M5*0.8-6H		3P	M5	0.8	6	4	70	16	25	3	A	4.2	○	
4202A-M5*0.8-6HX		3P	M5	0.8	6	4	70	16	25	3	A	4.2	○	
4202AS-M5*0.8-6H		1.5P	M5	0.8	6	4	70	16	25	3	A	4.2	○	
4202AS-M5*0.8-6HX		1.5P	M5	0.8	6	4	70	16	25	3	A	4.2	○	
4202A-M6*0.75-6H		3P	M6	0.75	6	5	80	19	30	3	A	5.25	○	
4202A-M6*0.75-6HX		3P	M6	0.75	6	5	80	19	30	3	A	5.25	○	
4202AS-M6*0.75-6H		1.5P	M6	0.75	6	5	80	19	30	3	A	5.25	○	
4202AS-M6*0.75-6HX		1.5P	M6	0.75	6	5	80	19	30	3	A	5.25	○	
4202A-M6*1-6H		3P	M6	1	6	4.7	80	19	30	3	A	5	○	
4202AC-M6*1.0-6H	*	3P	M6	1	6	4.7	80	19	30	3	A	5	○	
4202A-M6*1-6HX		3P	M6	1	6	4.7	80	19	30	3	A	5	○	
4202AS-M6*1.0-6H		1.5P	M6	1	6	4.7	80	19	30	3	A	5	○	
4202ACS-M6*1-6H	*	1.5P	M6	1	6	4.7	80	19	30	3	A	5	○	
4202AS-M6*1.0-6HX		1.5P	M6	1	6	4.7	80	19	30	3	A	5	○	
4202A-M7*1-6H		3P	M7	1	7	5.7	80	19	30	3	A	6	○	
4202AS-M7*1.0-6H		1.5P	M7	1	7	5.7	80	19	30	3	A	6	○	
4202A-M8*1-6H		3P	M8	1	8	6.7	90	20	35	3	A	7	○	
4202AS-M8*1.0-6H		1.5P	M8	1	8	6.7	90	20	35	3	A	7	○	
4202A-M8*1.25-6H		3P	M8	1.25	8	6.4	90	22	35	3	A	6.75	○	
4202AC-M8*1.25-6H	*	3P	M8	1.25	8	6.4	90	22	35	3	A	6.75	○	
4202A-M8*1.25-6HX		3P	M8	1.25	8	6.4	90	22	35	3	A	6.75	○	
4202AS-M8*1.25-6H		1.5P	M8	1.25	8	6.4	90	22	35	3	A	6.75	○	
4202ACS-M8*1.25-6H	*	1.5P	M8	1.25	8	6.4	90	22	35	3	A	6.75	○	
4202AS-M8*1.25-6HX		1.5P	M8	1.25	8	6.4	90	22	35	3	A	6.75	○	
4202A-M10*1-6H		3P	M10	1	10	8.7	100	20	39	4	A	9	○	

● Ex stock ○ On demand

\* With internal cooling

## Application field

P	M	K	N	S	H
			✓		

✓ Very suitable

✓ Suitable

System code > C176

Machining instructions > C201

Cutting data > C192

Nonstandard order > C198






## Tap, straight flute Non-ferrous metals

**4202A**



- Type of shank DIN 10
- Coolant exit, axial concentric

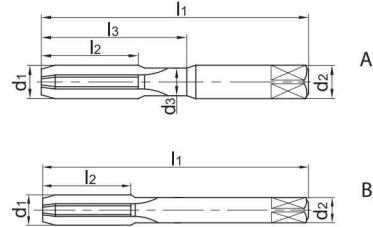

Article	*	Dimensions [mm]									Teeth	Geometry	Coredrill		Grade
			d <sub>1</sub>	P	d <sub>2</sub>	d <sub>3</sub>	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	d			YK40F		
4202AS-M10*1.0-6H		1.5P	M10	1	10	8.7	100	20	39	4	A	9	○		
4202A-M10*1.25-6H		3P	M10	1.25	10	8.4	100	24	39	4	A	8.75	○		
4202AS-M10*1.25-6H		1.5P	M10	1.25	10	8.4	100	24	39	4	A	8.75	○		
4202A-M10*1.5-6H		3P	M10	1.5	10	8.1	100	24	39	4	A	8.5	○		
4202AC-M10*1.5-6H	*	3P	M10	1.5	10	8.1	100	24	39	4	A	8.5	○		
4202A-M10*1.5-6HX		3P	M10	1.5	10	8.1	100	24	39	4	A	8.5	○		
4202AS-M10*1.5-6H		1.5P	M10	1.5	10	8.1	100	24	39	4	A	8.5	○		
4202ACS-M10*1.5-6H	*	1.5P	M10	1.5	10	8.1	100	24	39	4	A	8.5	○		
4202AS-M10*1.5-6HX		1.5P	M10	1.5	10	8.1	100	24	39	4	A	8.5	○		
4202A-M12*1.25-6H		3P	M12	1.25	9		110	29		4	B	10.75	○		
4202AS-M12*1.25-6H		1.5P	M12	1.25	9		110	29		4	B	10.75	○		
4202A-M12*1.5-6H		3P	M12	1.5	9		110	29		4	B	10.5	○		
4202AS-M12*1.5-6H		1.5P	M12	1.5	9		110	29		4	B	10.5	○		
4202A-M12*1.75-6H		3P	M12	1.75	9		110	29		4	B	10.25	○		
4202AC-M12*1.75-6H	*	3P	M12	1.75	9		110	29		4	B	10.25	○		
4202A-M12*1.75-6HX		3P	M12	1.75	9		110	29		4	B	10.25	○		
4202AS-M12*1.75-6H		1.5P	M12	1.75	9		110	29		4	B	10.25	●		
4202ACS-M12*1.75-6H	*	1.5P	M12	1.75	9		110	29		4	B	10.25	○		
4202AS-M12*1.75-6HX		1.5P	M12	1.75	9		110	29		4	B	10.25	○		
4202A-M14*1.5-6H		3P	M14	1.5	11		110	30		4	B	12.5	○		
4202AS-M14*1.5-6H		1.5P	M14	1.5	11		110	30		4	B	12.5	○		
4202A-M14*2-6H		3P	M14	2	11		110	30		4	B	12	○		
4202AS-M14*2.0-6H		1.5P	M14	2	11		110	30		4	B	12	○		
4202A-M16*1.5-6H		3P	M16	1.5	12		110	32		4	B	14.5	○		
4202AS-M16*1.5-6H		1.5P	M16	1.5	12		110	32		4	B	14.5	○		
4202A-M16*2-6H		3P	M16	2	12		110	32		4	B	14	○		
4202AS-M16*2-6H		1.5P	M16	2	12		110	32		4	B	14	○		
4202A-M16*2-6HX		3P	M16	2	12		110	32		4	B	14	○		
4202AS-M16*2.0-6H		1.5P	M16	2	12		110	32		4	B	14	○		
4202AS-M16*2.0-6HX		1.5P	M16	2	12		110	32		4	B	14	○		

● Ex stock ○ On demand

\* With internal cooling

### Application field

P	M	K	N	S	H
			✓		

- ✓ Very suitable
- ✓ Suitable

System code > C176

Machining instructions > C201

Cutting data > C192

Nonstandard order > C198


## Thread milling cutter, coated

Steel, cast iron, non-ferrous metals

4111



– Factory standard



Article	*	Dimensions [mm]						Teeth	Coredrill d	Grade	
		D	d <sub>1</sub>	P	d <sub>2</sub>	l <sub>1</sub>	l <sub>2</sub>			KTG4015	YK40F
4111-M3*0.5		M3	2.35	0.5	4	50	6	3	2.5	●	●
4111-M4*0.7		M4	3.15	0.7	4	50	8	3	3.3	●	○
4111-M5*0.8		M5	4	0.8	6	50	10	3	4.2	●	○
4111-M5*0.5		M5	4.3	0.5	6	50	10	3	4.5	●	○
4111-M6*1		M6	4.75	1	6	60	12	4	5	●	●
4111-M6*0.75		M6	5	0.75	6	60	12	4	5.25	●	○
4111-M8*1.25		M8	6.45	1.25	8	60	16	4	6.75	●	●
4111-M8*1		M8	6.65	1	8	60	16	4	7	●	○
4111-M10*1.5		M10	8.1	1.5	10	75	20	4	8.5	●	○
4111-M10*1		M10	8.55	1	10	75	20	4	9	●	○
4111-M12*1.75		M12	9.75	1.75	12	75	24	4	10.25	●	○
4111-M12*1.25		M12	10.25	1.25	12	75	24	4	10.75	●	○
4111-M14*2		M14	11.4	2	14	75	28	4	12	●	○
4111-M14*1.5		M14	11.9	1.5	14	75	28	4	12.5	●	○
4111-M14*1		M14	12.35	1	14	75	20	4	13	●	○
4111-M16*2		M16	13.3	2	16	90	32	6	14	●	○
4111-M18*2.5		M18	14.75	2.5	18	90	36	6	15.5	●	○
4111-M18*1		M18	16.15	1	18	90	20	6	17	●	○
4111-M20*2.5		M20	16.65	2.5	18	100	40	6	17.5	●	○
4111-M20*2		M20	17.1	2	18	100	40	6	18	●	○

● Ex stock ○ On demand

\* With internal cooling

## Application field

P	M	K	N	S	H
✓		✓	✓		

✓ Very suitable

✓ Suitable

System code &gt; C176

Machining instructions &gt; C201

Cutting data &gt; C192

Nonstandard order &gt; C198





## Guide for recommended cutting data – Solid carbide threading tools

### Solid carbide threading tools

	Material group	Composition / structure / heat treatment		Brinell hardness HB	Machining group	Starting values for cutting speed v <sub>c</sub> [m/min]							
						Thread former		Thread former			Thread former		
						4122A 4222A	4122M 4222M	4201C	4201A	4202C	4202A	KTG40115	
						YK40F	YK40F	YK40F	YK40F	YK40F	YK40F		
						Coolant			f-group				
external	external	external	external	external	external	external							
<b>P</b>	Unalloyed steel	ca. 0,15 % C	annealed	125	1		20					100	1
		ca. 0,45 % C	annealed	190	2		20					90	1
		ca. 0,45 % C	tempered	250	3		20					80	1
		ca. 0,75 % C	annealed	270	4		20					70	1
	Low-alloyed steel		annealed	180	6		20					90	1
			tempered	275	7		20					70	1
			tempered	300	8		20					60	1
			tempered	350	9		20					55	1
High-alloyed steel and high-alloyed tool steel		annealed	200	10		20					80	1	
		hardened and tempered	325	11		20					50	1	
<b>M</b>	Stainless steel	ferritic/martensitic		200	12		20						
		martensitic	tempered	240	13		20						
		austenitic	quench hardened	180	14		20						
		austenitic-ferritic		230	15		20						
<b>K</b>	Grey cast iron	perlite/ferritic		180	16			20		20		80	1
		perlite (martensitic)		260	17			20		20		60	1
	Cast iron with spheroidal graphite	ferritic		160	18			15		15		80	1
		perlite		250	19			15		15		60	1
	Malleable cast iron	ferritic		130	20			20		20		60	1
perlite			230	21			20		20		80	1	
<b>N</b>	Aluminium wrought alloys	cannot be hardened		60	22							180	1
		hardenable	hardened	100	23							150	1
	Cast aluminium alloys	≤ 12 % Si, cannot be hardened		75	24	30	30		30		30	150	1
		≤ 12 % Si, hardenable	hardened	90	25	25	25		25		25	150	1
		> 12 % Si, cannot be hardened		130	26							150	1
	Copper and copper alloys (bronze/brass)	machining steel, PB > 1%		110	27							150	1
CuZn, CuSnZn			90	28							150	1	
	CuSn, Pb-free copper, electrolytic copper		100	29							150	1	
<b>S</b>	Heat-resistant alloys	Fe-based alloys	annealed	200	30								
			hardened	280	31								
		Ni or Co base	annealed	250	32								
			hardened	350	33								
		cast	320	34									
Titanium alloys	pure titanium		R <sub>m</sub> 400	35									
	α and β alloys	hardened	R <sub>m</sub> 1050	36									
<b>H</b>	Hardened steel		hardened and tempered	55 HRC	37								
			hardened and tempered	60 HRC	38								
	Hard cast iron		cast	400	39								
	Hardened cast iron		hardened and tempered	55 HRC	40								
<b>X</b>	Non-metallic materials	Thermoplasts			41								
		Thermosetting plastics			42								
		Plastic, glass-fibre reinforced GFRP			43								
		Plastic, carbon fibre reinforced CFRP			44								
		Graphite			45								
	Wood			46									

Note: The given cutting values are guide values, which were determined under ideal conditions. The values have to be adapted in individual cases. With hole depths of 5xD adjust the cutting data accordingly to the application. f-group = feed rate recommendations on page C164. For examples of material for cutting tool groups view page D22.

**Recommend feed rate**

**Solid carbide threading tools**

**4**

f-group	Feed rate [mm]																			
	Ø1	Ø2	Ø3	Ø4	Ø5	Ø6	Ø7	Ø8	Ø9	Ø10	Ø11	Ø12	Ø13	Ø14	Ø15	Ø16	Ø17	Ø18	Ø19	Ø20
1	0,01	0,02	0,03	0,04	0,04	0,05	0,05	0,06	0,06	0,06	0,07	0,07	0,08	0,08	0,09	0,09	0,09	0,09	0,10	0,10
2	0,01	0,02	0,03	0,04	0,05	0,06	0,06	0,06	0,07	0,07	0,08	0,09	0,09	0,09	0,10	0,10	0,10	0,11	0,11	0,11
3	0,01	0,02	0,04	0,05	0,06	0,06	0,07	0,07	0,08	0,09	0,09	0,10	0,10	0,11	0,11	0,12	0,12	0,12	0,13	0,13
4	0,02	0,03	0,04	0,06	0,06	0,07	0,08	0,09	0,09	0,10	0,11	0,11	0,12	0,13	0,14	0,15	0,15	0,16	0,16	0,17
5	0,02	0,03	0,05	0,06	0,07	0,09	0,09	0,10	0,11	0,11	0,12	0,13	0,14	0,14	0,15	0,15	0,16	0,16	0,17	0,17
6	0,02	0,04	0,06	0,07	0,09	0,10	0,11	0,11	0,12	0,13	0,14	0,15	0,16	0,17	0,17	0,18	0,18	0,19	0,19	0,20
7	0,02	0,04	0,06	0,09	0,10	0,11	0,12	0,13	0,14	0,15	0,16	0,17	0,18	0,19	0,20	0,20	0,21	0,22	0,22	0,23
8	0,03	0,05	0,07	0,10	0,11	0,13	0,14	0,15	0,16	0,17	0,18	0,20	0,21	0,22	0,23	0,23	0,24	0,25	0,26	0,26
9	0,03	0,06	0,08	0,11	0,13	0,15	0,16	0,17	0,18	0,20	0,21	0,23	0,24	0,25	0,26	0,27	0,28	0,29	0,29	0,30
10	0,04	0,07	0,10	0,13	0,15	0,17	0,19	0,20	0,21	0,23	0,24	0,26	0,27	0,29	0,30	0,31	0,32	0,33	0,34	0,35
11	0,04	0,07	0,11	0,15	0,17	0,20	0,21	0,23	0,24	0,26	0,28	0,30	0,32	0,33	0,35	0,36	0,37	0,38	0,39	0,40
12	0,05	0,09	0,13	0,17	0,20	0,23	0,25	0,26	0,28	0,30	0,32	0,35	0,36	0,38	0,40	0,41	0,42	0,44	0,45	0,46
13	0,05	0,10	0,15	0,20	0,23	0,26	0,28	0,30	0,32	0,35	0,37	0,40	0,42	0,44	0,46	0,47	0,49	0,50	0,52	0,53
14	0,06	0,11	0,17	0,23	0,26	0,30	0,33	0,35	0,37	0,40	0,43	0,46	0,48	0,50	0,53	0,54	0,56	0,58	0,59	0,61
15	0,07	0,13	0,20	0,26	0,30	0,35	0,37	0,40	0,43	0,46	0,49	0,53	0,55	0,58	0,61	0,62	0,64	0,66	0,68	0,70

Note: The given cutting values are guide values, which were determined under ideal conditions. The values have to be adapted in individual cases.

1. Select the appropriate product series.
2. Determine the immersion.
3. Select the used material and read the cutting speed.
4. Determine the feed rate group and have a look at the appropriate feed rate recommendations.
5. Select the diameter of tool and determine the immersion.

**A**

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information

**E**

Index

## Solid carbide threading tools

	Material group	Composition / structure / heat treatment	Brinell hardness HB	Machining group	Starting values for cutting speed $v_c$ [m/min]							
					Thread former		Thread tap			Thread milling		
					4122A 4222A	4122M 4222M	4201C	4201A	4202C	4202A	4111	
					YK40F	YK40F	YK40F	YK40F	YK40F	YK40F	KTG4015	
Coolant												
External	External	External	External	External	External	External	External	f-group				
<b>P</b>	Unalloyed steel	approx. 0,15 % C	annealed	125	1		20				100	1
		approx. 0,45 % C	annealed	190	2		20				90	1
		approx. 0,45 % C	tempered	250	3		20				80	1
		approx. 0,75 % C	annealed	270	4		20				70	1
		approx. 0,75 % C	tempered	300	5		20				70	1
	Low-alloyed steel		annealed	180	6		20				90	1
			tempered	275	7		20				70	1
			tempered	300	8		20				60	1
			tempered	350	9		20				55	1
		High-alloyed steel and high-alloyed tool steel	annealed	200	10		20				80	1
	hardened and tempered	325	11		20				50	1		
<b>M</b>	Stainless steel	ferritic/martensitic	annealed	200	12		20					
		martensitic	tempered	240	13		20					
		austenitic	quench hardened	180	14		20					
		austenitic-ferritic		230	15		20					
<b>K</b>	Grey cast iron	perlitic/ferritic		180	16			20	20		80	1
		perlitic (martensitic)		260	17			20	20		60	1
	Cast iron with spheroidal graphite	ferritic		160	18			15	15		80	1
		perlitic		250	19			15	15		60	1
	Malleable cast iron	ferritic		130	20			20	20		60	1
		perlitic		230	21			20	20		80	1
<b>N</b>	Aluminium wrought alloys	cannot be hardened		60	22						180	1
		hardenable	hardened	100	23						150	1
	Cast aluminium alloys	$\leq 12\%$ Si, cannot be hardened		75	24	30	30		30	30	150	1
		$\leq 12\%$ Si, hardenable	hardened	90	25	25	25		25	25	150	1
		$> 12\%$ Si, cannot be hardened		130	26						150	1
	Copper and copper alloys (bronze/brass)	machining steel, PB> 1%		110	27						150	1
CuZn, CuSnZn			90	28						150	1	
	CuSn, Pb-free copper, electrolytic copper		100	29						150	1	
<b>S</b>	Heat-resistant alloys	Fe-based alloys	annealed	200	30							
			hardened	280	31							
		Ni or Co base	annealed	250	32							
			hardened	350	33							
		cast	320	34								
	Titanium alloys	pure titanium		R <sub>m</sub> 400	35							
$\alpha$ and $\beta$ alloys		hardened	R <sub>m</sub> 1050	36								
<b>H</b>	Hardened steel		hardened and tempered	55 HRC	37							
			hardened and tempered	60 HRC	38							
	Hard cast iron		cast	400	39							
	Hardened cast iron		hardened and tempered	55 HRC	40							
<b>X</b>	Non-metallic materials	Thermoplasts			41							
		Thermosetting plastics			42							
		Plastic, glass-fibre reinforced GFRP			43							
		Plastic, carbon fibre reinforced CFRP			44							
		Graphite			45							
	Wood			46								

Note: The given cutting values are guide values, which were determined under ideal conditions.  
 The values have to be adapted in individual cases.  
 With hole depths of 5xD adjust the cutting data accordingly to the application.  
 f-group = feed rate recommendations on page C196.  
 For examples of material for cutting tool groups view page D11.



## Recommended feed rate

### Solid carbide threading tools

Groupe f	Feed rate [mm]																			
	Ø1	Ø2	Ø3	Ø4	Ø5	Ø6	Ø7	Ø8	Ø9	Ø10	Ø11	Ø12	Ø13	Ø14	Ø15	Ø16	Ø17	Ø18	Ø19	Ø20
1	0,01	0,02	0,03	0,04	0,04	0,05	0,05	0,06	0,06	0,06	0,07	0,07	0,08	0,08	0,09	0,09	0,09	0,09	0,10	0,10
2	0,01	0,02	0,03	0,04	0,05	0,06	0,06	0,06	0,07	0,07	0,08	0,09	0,09	0,09	0,10	0,10	0,10	0,10	0,11	0,11
3	0,01	0,02	0,04	0,05	0,06	0,06	0,07	0,07	0,08	0,09	0,09	0,10	0,10	0,11	0,11	0,12	0,12	0,12	0,13	0,13
4	0,02	0,03	0,04	0,06	0,06	0,07	0,08	0,09	0,09	0,10	0,11	0,11	0,12	0,12	0,13	0,13	0,14	0,14	0,15	0,15
5	0,02	0,03	0,05	0,06	0,07	0,09	0,09	0,10	0,11	0,11	0,12	0,13	0,14	0,14	0,15	0,15	0,16	0,16	0,17	0,17
6	0,02	0,04	0,06	0,07	0,09	0,10	0,11	0,11	0,12	0,13	0,14	0,15	0,16	0,17	0,17	0,18	0,18	0,19	0,19	0,20
7	0,02	0,04	0,06	0,09	0,10	0,11	0,12	0,13	0,14	0,15	0,16	0,17	0,18	0,19	0,20	0,20	0,21	0,22	0,22	0,23
8	0,03	0,05	0,07	0,10	0,11	0,13	0,14	0,15	0,16	0,17	0,18	0,20	0,21	0,22	0,23	0,23	0,24	0,25	0,26	0,26
9	0,03	0,06	0,08	0,11	0,13	0,15	0,16	0,17	0,18	0,20	0,21	0,23	0,24	0,25	0,26	0,27	0,28	0,29	0,29	0,30
10	0,04	0,07	0,10	0,13	0,15	0,17	0,19	0,20	0,21	0,23	0,24	0,26	0,27	0,29	0,30	0,31	0,32	0,33	0,34	0,35
11	0,04	0,07	0,11	0,15	0,17	0,20	0,21	0,23	0,24	0,26	0,28	0,30	0,32	0,33	0,35	0,36	0,37	0,38	0,39	0,40
12	0,05	0,09	0,13	0,17	0,20	0,23	0,25	0,26	0,28	0,30	0,32	0,35	0,36	0,38	0,40	0,41	0,42	0,44	0,45	0,46
13	0,05	0,10	0,15	0,20	0,23	0,26	0,28	0,30	0,32	0,35	0,37	0,40	0,42	0,44	0,46	0,47	0,49	0,50	0,52	0,53
14	0,06	0,11	0,17	0,23	0,26	0,30	0,33	0,35	0,37	0,40	0,43	0,46	0,48	0,50	0,53	0,54	0,56	0,58	0,59	0,61
15	0,07	0,13	0,20	0,26	0,30	0,35	0,37	0,40	0,43	0,46	0,49	0,53	0,55	0,58	0,61	0,62	0,64	0,66	0,68	0,70

Note: The given cutting values are guide values, which were determined under ideal conditions.  
The values have to be adapted in individual cases.

A

Turning

B

Milling

C

Drilling

D

Technical Information

E

Index